

# DMX CHARTS

RDM Personality ID List		RDM Model ID
ID	Mode	
1	Standard	0xA003

DMX Chart Summary

Channel	Standard
1	Pan
2	Pan Fine
3	Tilt
4	Tilt Fine
5	Dimmer
6	Dimmer Fine
7	Shutter
8	Cyan
9	Magenta
10	Yellow
11	Color Wheel 1
12	Color Wheel 2
13	Color Wheel 3
14	Rot Gobo
15	Rot Gobo Rotation
16	Rot Gobo Rotation Fine
17	Fixed Gogo
18	4f Circular Prism
19	4f Circular Prism Insertion
20	8f Circular Prism
21	8f Circular Prism Insertion
22	Frost
23	Zoom
24	Zoom Fine
25	Focus
26	Focus Fine
27	Animation Insertion
28	Animation Rotation
29	Beam / Spot Filter
30	Control

STD	Function	DMX Value	Default
1	<b>PAN</b> Lineary from 0% to 100%	000 ÷ 255	128
2	<b>PAN FINE</b> Lineary from 0% to 100%	000 ÷ 255	128
3	<b>TILT</b> Lineary from 0% to 100%	000 ÷ 255	128
4	<b>TILT FINE</b> Lineary from 0% to 100%	000 ÷ 255	128
5	<b>DIMMER</b> Lineary from close to open	000 ÷ 255	000
6	<b>DIMMER FINE</b> Lineary from close to open	000 ÷ 255	000
7	<b>SHUTTER</b> Close Strobe from slow to fast Open Pulse in from slow to fast Open Pulse out from slow to fast Open Random from slow to fast Open	000 ÷ 001 002 ÷ 062 063 ÷ 064 065 ÷ 125 126 ÷ 127 128 ÷ 188 189 ÷ 190 191 ÷ 251 252 ÷ 255	255
	<b>CYAN</b> Linear insertion from 0% to 100% * <b>Color Wheel 1 must be @ 0</b>	000 ÷ 255	
	<b>MAGENTA</b> Linear insertion from 0% to 100% * <b>Color Wheel 2 must be @ 0</b>	000 ÷ 255	
	<b>YELLOW</b> Linear insertion from 0% to 100% * <b>Color Wheel 3 must be @ 0</b>	000 ÷ 255	
	<b>COLOR WHEEL 1</b> <b>Indexed</b> Open Open + UV UV UV + Lavander Lavander Lavander + CTO 3200K CTO 3200K CTO 3200K + CTO 2500K CTO 2500K CTO 2500K + Blue Wood Blue Wood Blue Wood + Open <b>Forward Spin</b> From fast to slow <b>Stop</b> Stop <b>Reverse Spin</b> From slow to fast	000 ÷ 013 014 ÷ 027 028 ÷ 041 042 ÷ 055 056 ÷ 069 070 ÷ 083 084 ÷ 097 098 ÷ 111 112 ÷ 125 126 ÷ 139 140 ÷ 153 154 ÷ 167 168 ÷ 210 211 ÷ 212 213 ÷ 255	
	<b>COLOR WHEEL 2</b> <b>Indexed</b> Open Open + Dark Green Dark Green Dark Green + CTB CTB CTB + Dark Blue Dark Blue Dark Blue + H.M. Green H.M. Green H.M. Green + Dark Red Dark Red Dark Red + Open <b>Forward Spin</b> From fast to slow <b>Stop</b> Stop <b>Reverse Spin</b> From slow to fast	000 ÷ 013 014 ÷ 027 028 ÷ 041 042 ÷ 055 056 ÷ 069 070 ÷ 083 084 ÷ 097 098 ÷ 111 112 ÷ 125 126 ÷ 139 140 ÷ 153 154 ÷ 167 168 ÷ 210 211 ÷ 212 213 ÷ 255	
			0

STD	Function	DMX Value	Default
12	<b>COLOR WHEEL 3</b> <b>Indexed</b> Open Open + Light Green Light Green Light Green + Pink Pink Pink + Acquamarine Acquamarine Acquamarine + Dark Orange Dark Orange Dark Orange + Light Orange Light Orange Light Orange + Open <b>Forward Spin</b> From fast to slow <b>Stop</b> Stop <b>Reverse Spin</b> From slow to fast	000 ÷ 013 014 ÷ 027 028 ÷ 041 042 ÷ 055 056 ÷ 069 070 ÷ 083 084 ÷ 097 098 ÷ 111 112 ÷ 125 126 ÷ 139 140 ÷ 153 154 ÷ 167 168 ÷ 210 211 ÷ 212 213 ÷ 255	0
14	<b>ROT GOBO (not available in Beam Mode)</b> <b>Indexed</b> Open Gobo 1 Gobo 2 Gobo 3 Gobo 4 Gobo 5 Gobo 6 Gobo 7 Gobo 8 Gobo 9 <b>Forward Spin</b> From fast to slow <b>Stop</b> Stop <b>Reverse Spin</b> From slow to fast <b>Shake</b> Gobo 1 from slow to fast Gobo 2 from slow to fast Gobo 3 from slow to fast Gobo 4 from slow to fast Gobo 5 from slow to fast Gobo 6 from slow to fast Gobo 7 from slow to fast Gobo 8 from slow to fast Gobo 9 from slow to fast	000 ÷ 008 009 ÷ 017 018 ÷ 026 027 ÷ 035 036 ÷ 044 045 ÷ 053 054 ÷ 062 063 ÷ 071 072 ÷ 080 081 ÷ 089 090 ÷ 131 132 ÷ 132 133 ÷ 174 175 ÷ 183 184 ÷ 192 193 ÷ 201 202 ÷ 210 211 ÷ 219 220 ÷ 228 229 ÷ 237 238 ÷ 246 247 ÷ 255	000
15	<b>R. GOBO ROTATION</b> <b>Indexed</b> Lineary from 0° to 360° <b>Forward Spin</b> From fast to slow <b>Stop</b> Stop <b>Reverse Spin</b> From slow to fast	000 ÷ 127 128 ÷ 190 191 ÷ 192 193 ÷ 255	000
16	<b>R. GOBO ROTATION FINE</b>	000 ÷ 255	000


STD	Function	DMX Value	Default
17	<b>FIXED GOBO</b> <b>Indexed</b> Open Gobo 1 Gobo 2 Gobo 3 Gobo 4 Gobo 5 Gobo 6 Gobo 7 Gobo 8 Gobo 9 Gobo 10 Gobo 11 Gobo 12 Gobo 13 Gobo 14 Gobo 15 Gobo 16 Gobo 17 Gobo 18 <b>Forward Spin</b> From fast to slow <b>Stop</b> Stop <b>Reverse Spin</b> From slow to fast <b>Shake</b> Gobo 1 from slow to fast Gobo 2 from slow to fast Gobo 3 from slow to fast Gobo 4 from slow to fast Gobo 5 from slow to fast Gobo 6 from slow to fast Gobo 7 from slow to fast Gobo 8 from slow to fast Gobo 9 from slow to fast Gobo 10 from slow to fast Gobo 11 from slow to fast Gobo 12 from slow to fast Gobo 13 from slow to fast Gobo 14 from slow to fast Gobo 15 from slow to fast Gobo 16 from slow to fast Gobo 17 from slow to fast Gobo 18 from slow to fast	0 ÷ 3 4 ÷ 7 8 ÷ 11 12 ÷ 15 16 ÷ 19 20 ÷ 23 24 ÷ 27 28 ÷ 31 32 ÷ 35 36 ÷ 39 40 ÷ 43 44 ÷ 47 48 ÷ 51 52 ÷ 55 56 ÷ 59 60 ÷ 63 64 ÷ 67 68 ÷ 71 72 ÷ 75 76 ÷ 127 128 ÷ 129 130 ÷ 181 182 ÷ 187 188 ÷ 191 192 ÷ 195 196 ÷ 199 200 ÷ 203 204 ÷ 207 208 ÷ 211 212 ÷ 215 216 ÷ 219 220 ÷ 223 224 ÷ 227 228 ÷ 231 232 ÷ 235 236 ÷ 239 240 ÷ 243 244 ÷ 247 248 ÷ 251 252 ÷ 255	000
18	<b>4F CIRCULAR PRISM</b> Open Prism insert	000 ÷ 127 128 ÷ 255	000
19	<b>4F CIRCULAR PRISM ROTATION</b> <b>Indexed</b> Lineary from 0° to 360° <b>Forward Spin</b> From fast to slow <b>Stop</b> Stop <b>Reverse Spin</b> From slow to fast	000 ÷ 127 128 ÷ 190 191 ÷ 192 193 ÷ 255	000
20	<b>8F CIRCULAR PRISM</b> Open Prism insert	000 ÷ 127 128 ÷ 255	000
21	<b>8F CIRCULAR PRISM ROTATION</b> <b>Indexed</b> Lineary from 0° to 360° <b>Forward Spin</b> From fast to slow <b>Stop</b> Stop <b>Reverse Spin</b> From slow to fast	000 ÷ 127 128 ÷ 190 191 ÷ 192 193 ÷ 255	000

STD	Function	DMX Value	Default
22	<b>FROST</b> Linear insertion from 0% to 100%	000 ÷ 255	000
23	<b>ZOOM</b> Lineary from narrow to wide	000 ÷ 255	000
24	<b>ZOOM FINE</b>	000 ÷ 255	000
25	<b>FOCUS</b> Linear from far to near	000 ÷ 255	000
26	<b>FOCUS FINE</b>	000 ÷ 255	000
27	<b>ANIMATION INSERTION</b> Linear insertion from 0% to 100%	000 ÷ 255	000
28	<b>ANIMATION ROTATION</b> <b>Indexed</b> Lineary from 0° to 360°	000 ÷ 127	
	<b>Forward Spin</b> From fast to slow	128 ÷ 190	000
	<b>Stop</b> Stop	191 ÷ 192	
	<b>Reverse Spin</b> From slow to fast	193 ÷ 255	
29	<b>BEAM / SPOT FILTER</b> Spot Mode	000 ÷ 127	000
	Beam Mode * Rot Gobo must be @ 0	128 ÷ 255	
30	<b>CONTROL</b> No Function/Safe	000 ÷ 001	
	PAN REVERSE ON	002 ÷ 003	
	PAN REVERSE OFF	004 ÷ 005	
	TILT REVERSE ON	006 ÷ 007	
	TILT REVERSE OFF	008 ÷ 009	
	PAN/TILT MODE FAST	010 ÷ 011	
	PAN/TILT MODE MEDIUM	012 ÷ 013	
	PAN/TILT MODE SLOW	014 ÷ 015	
	MOVEMENT IN BLACKOUT ON	016 ÷ 017	
	MOVEMENT IN BLACKOUT OFF	018 ÷ 019	
	COLOR WHEEL 1 BLACKOUT ON (index)	020 ÷ 021	
	COLOR WHEEL 1 BLACKOUT OFF (index)	022 ÷ 023	
	COLOR WHEEL 2 BLACKOUT ON (index)	024 ÷ 025	
	COLOR WHEEL 2 BLACKOUT OFF (index)	026 ÷ 027	
	COLOR WHEEL 3 BLACKOUT ON (index)	028 ÷ 029	
	COLOR WHEEL 3 BLACKOUT OFF (index)	030 ÷ 031	
	ROTATING GOBO WHEEL BLACKOUT ON (index)	032 ÷ 033	
	ROTATING GOBO WHEEL BLACKOUT OFF (index)	034 ÷ 035	
	FIXED GOBO WHEEL BLACKOUT ON (index)	036 ÷ 037	
	FIXED GOBO WHEEL BLACKOUT OFF (index)	038 ÷ 039	
	COLOR WHEEL 1 CONTINUOUS MOVEMENT (index)	040 ÷ 041	
	COLOR WHEEL 1 STEP MOVEMENT (index)	042 ÷ 043	
	COLOR WHEEL 2 CONTINUOUS MOVEMENT (index)	044 ÷ 045	
	COLOR WHEEL 2 STEP MOVEMENT (index)	046 ÷ 047	000
	COLOR WHEEL 3 CONTINUOUS MOVEMENT (index)	048 ÷ 049	
	COLOR WHEEL 3 STEP MOVEMENT (index)	050 ÷ 051	
	ROTATING GOBO WHEEL CONTINUOUS MOVEMENT (index)	052 ÷ 053	
	ROTATING GOBO WHEEL STEP MOVEMENT (index)	054 ÷ 055	
	FIXED GOBO WHEEL CONTINUOUS MOVEMENT (index)	056 ÷ 057	
	FIXED GOBO WHEEL STEP MOVEMENT (index)	058 ÷ 059	
	HOME MODE STANDARD	060 ÷ 061	
	HOME MODE CUSTOM	062 ÷ 063	
	DISPLAY ON	064 ÷ 065	
	DISPLAY 10S	066 ÷ 067	
	DISPLAY 20S	068 ÷ 069	
	DISPLAY 30S	070 ÷ 071	
	FLIP DISPLAY ON	072 ÷ 073	
	FLIP DISPLAY OFF	074 ÷ 075	
	FLIP DISPLAY AUTO	076 ÷ 077	
	KEY LOCK ON	078 ÷ 079	
	KEY LOCK OFF	080 ÷ 081	
	NO SIGNAL HOLD	082 ÷ 083	
	NO SIGNAL BLACKOUT	084 ÷ 085	
	STATUS LED ON	086 ÷ 087	
	STATUS LED OFF	088 ÷ 089	
	INVERT ZOOM OFF	090 ÷ 091	
	INVERT ZOOM ON	092 ÷ 093	
	RESET ALL	094 ÷ 095	

STD	Function	DMX Value	Default
	RESET PAN/TILT	096 ÷ 097	
	RESET COLOR 1	098 ÷ 099	
	RESET COLOR 2	100 ÷ 101	
	RESET COLOR 3	102 ÷ 103	
	RESET CYAN	104 ÷ 105	
	RESET MAGENTA	106 ÷ 107	
	RESET YELLOW	108 ÷ 109	
	RESET ROTATING GOBO	110 ÷ 111	
	RESET GOBO ROTATION	112 ÷ 113	
	RESET FIXED GOBO	114 ÷ 115	
30	RESET ZOOM	116 ÷ 117	
	RESET FOCUS	118 ÷ 119	
	RESET ANIMATION	120 ÷ 121	
	RESET 4F PRISM	122 ÷ 123	
	RESET 8F PRISM	124 ÷ 125	
	RESET FROST	126 ÷ 127	
	RESET SHUTTER	128 ÷ 129	
	RESET OTHER	130 ÷ 131	
	LAMP OFF	132 ÷ 133	
	LAMP ON	134 ÷ 135	
	Reserved	136 ÷ 253	
	FACTORY DEFAULT OF CONTROL FUNCTIONS	254 ÷ 255	000

## FIXED GOBOS WHEEL



---

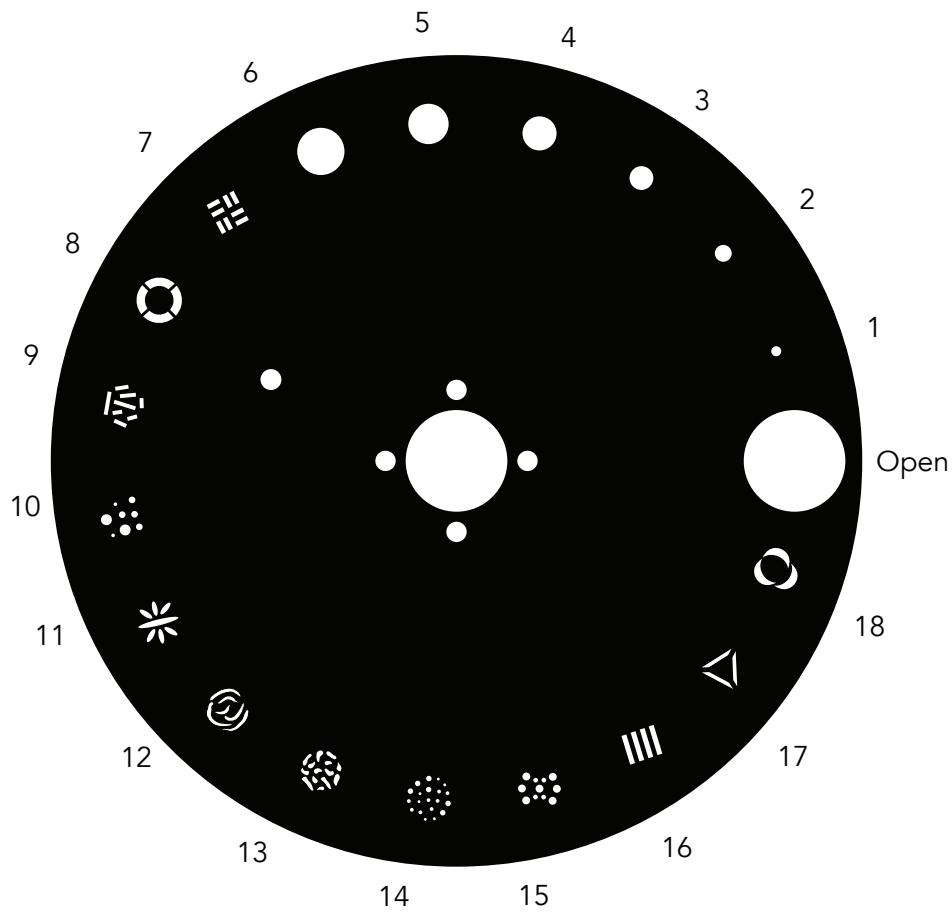

## ROTATING GOBOS WHEEL

Gobo dimensions:

- Type B
- Ø external (OD)= 15.9 mm
- Ø of image (ID)= 12 mm
- Thickness= 1.1 mm

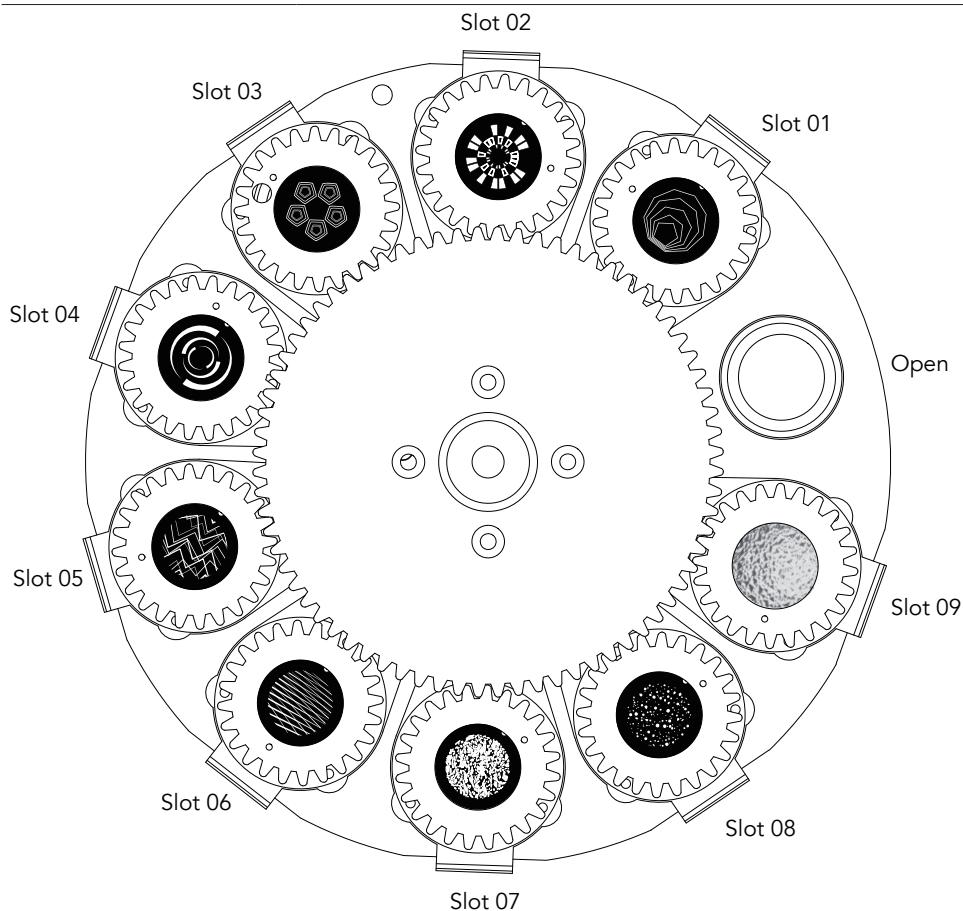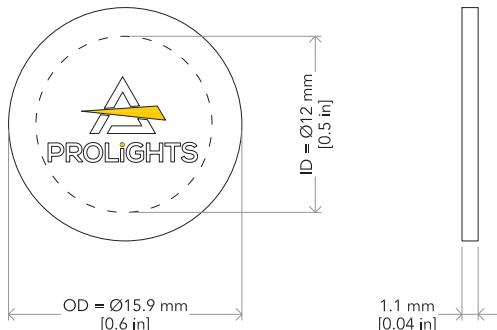


**ATTENTION! Load with mirror surface toward the light source.**


# COLOR WHEEL

---

CYAN - COLOR WHEEL 1

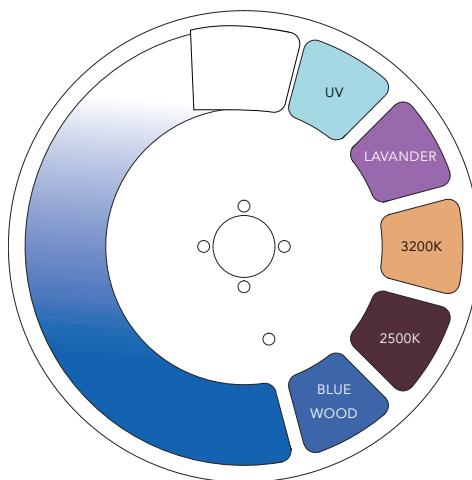

MAGENTA - COLOR WHEEL 2

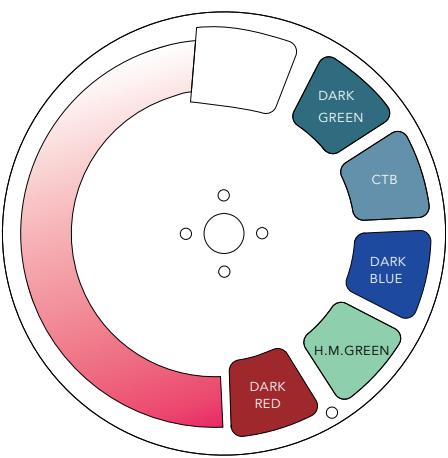

YELLOW - COLOR WHEEL 3

